




TruRyde®

Medium Duty Components 8K - 16K

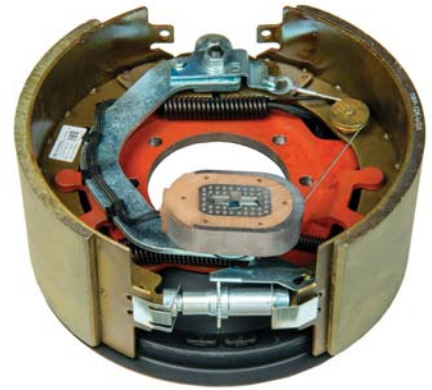

TRP International (Elkhart)
22420 Challenger Drive
Elkhart, IN. 46514
574.389.9941

Contact Us Today...



www.trpintl.com
trpintl@trpintl.com

TRP International (Dallas)
324 S. Town East Blvd.
Mesquite, TX. 75149
972.279.9863



HUB/DRUM ASSEMBLIES

8K,8 on 6.50"



10K,8 on 6.50"



12K,8 on 6.50"



16K,8 on 275mm



PART NUMBER	DESCRIPTION			UNIT WT.	CASE QTY.	CASE WT.	
	CAPACITY	BOLT DIA.	INNER RACE				OUTER RACE
<i>RVD-8K-865-916-G</i>	8,000 lb.	8 on 6.50"	25520	02420	51.40 lb.	36 pc.	1,951 lb.
<i>RVD-8K-865-580-G</i>	8,000	8 on 6.50"	25520	02420	51.90	36	1,969
<i>RVD-8K-865-916</i>	8,000	8 on 6.50"	25520	02420	51.40	36	1,951
<i>RVD-8K-865-580</i>	8,000	8 on 6.50"	25520	02420	51.90	36	1,969
<i>RVD-10K-865-580</i>	10,000	8 on 6.50"	382A	25520	81.10	27	2,238
<i>RVD-10KSHT-865-580</i>	10,000	8 on 6.50"	382A	25520	66.35	36	2,438
<i>RVD-12K-865-580</i>	12,000	8 on 6.50"	3920	28622	95.10	27	2,263
<i>RVD-16K-8275-M22</i>	16,000	8 on 275mm	3920	28622	136.30	18	2,420

- 8K drums with -G suffix in the part number designate grease versions
- 8K-916 studs are 9/16"-18x2.30", 8K-580 studs are 5/8"-18x2.75"
- 10K and 12K studs are 5/8"-18x3.44" with REACH compliant zinc plated finish.
- 16K studs are M22x1.50"x4.80" with REACH compliant zinc plated finish.
- ASTM test bar method used to monitor tensile strength.
- Inspected 100% before painting including the races for proper seating.
- All components are manufactured utilizing industry recognized materials and/or substitutes and assembled in ISO/TS-16949 registered facility.
- Drums are chemically cleaned and painted black in electrostatic booth.
- The specifications and dimensions above are for reference only.