



SUPPLYING THE WORLD.







LETTER FROM THE PRESIDENT

Since 2011, TRP International has provided components such as spindles, hubs, drums, brakes, bearings, seals, dust caps, and fasteners to the Agricultural market. More recently, TRP incorporated its line of jacks and couplers from the high speed business to include in the agricultural offerings.

TRP combines domestic state-of-the-art machining and assembly capabilities with extensive global sourcing to provide cost-effective solutions and on-time delivery. We offer rapid response capacity for emergency requirements, prototyping, and product co-development, and have access to an infinite variety of product finishes.

Our commitment to quality goes beyond the products we manufacture and extends into our commitment to superior customer service. We have invested in upgrades to our quality systems and have significantly upgraded our product launch, planning, and scheduling processes for faster response times.

We are deeply grateful to our customers, vendors, and employees for their ongoing support, without which our success would not be possible. We value these relationships and remain committed to being loyal and dedicated partners well into the future.

We appreciate your interest in our Agricultural Components catalog and look forward to speaking with you about your product needs. The TRP International team is ready to serve you, our valued customer.

Sincerely,

Chris Mileger **Chris Mileger**

President.

TRP International, LLC.



TABLE OF CONTENTS

| TRP INTERNATIONAL, LLC. | 4-7 |
|--|-------|
| EMCO INDUSTRIES | 8-9 |
| AG PRODUCTS | |
| AG Spindles | 10-11 |
| AG Hub Glossary | 12 |
| 4 Bolt AG Hubs (10-4, 12-4, 669, 633) | 13 |
| 5 Bolt AG Hubs (20-5, 736, 511, 25-5, 719) | 14 |
| 6 Bolt AG Hubs (30-6, 35-6, 888, 611, 803, 660) | 15-17 |
| 8 Bolt AG Hubs (45-8, 778, 813B, 819B, 821, 60-8B, 75-8B, 80-8B) | 18-19 |
| 10 Bolt AG Hubs (871B, 873B, 881, 882, 981) | 20-21 |
| AG Brake Drums / AG Hydraulic Brakes | 22 |
| Tapered Roller Bearings | 23 |
| AG Grease Seals | 24 |
| AG Dust Caps | 25 |
| Spindle Fasteners | 26 |
| Fasteners / U-Bolts | 27 |
| JACKS & COUPLERS | |
| Trailer Frame Jacks | 28-29 |
| Couplers | 30-32 |
| Winches | 32-33 |
| Surge Actuators | 33 |
| Accessories & Parts | 34-35 |
| HIGH SPEED PRODUCTS | 36-37 |
| EMCO INDUSTRIES | 37 |
| CUSTOM MANUFACTURED COMPONENTS | 38 |
| TERMS & CONDITIONS | 30 |



THROUGHOUT THIS CATALOG A TRP SERVICE MARK APPEARS NEXT TO THOSE PRODUCTS MANUFACTURED BY TRP.

OUR STRATEGY

MISSION STATEMENT

Our mission is to provide our customers with an expansive line of quality products distributed on schedule, at competitive prices, with responsive and professional service.

VISION STATEMENT

The TRP group of companies will be a leading global supplier of axle, suspension, and other frame and trailer components to a variety of ground transportation equipment industries by providing excellent products and services to our customers, challenging opportunities or our employees, and positive contributions to our communities.

QUALITY POLICY

TRP International, LLC. is committed to using proven quality management principles to safely produce and source quality products and services that exceed customer expectations for value, performance, and reliability through continual improvement of our business systems.





OUR CORE VALUES



PEOPLE MATTER

People-oriented beliefs and values. Treating everyone with dignity, respect, understanding, and acting without prejudice. Offering mentorship, development, and empowerment.



CUSTOMER FOCUSED

Serving both internal team members and external customers' needs with a commitment to exceptional and timely support.



DOING RIGHT

Commitment to honesty, integrity, trust, and accountability. Decisions and actions benefiting our people, our customers, our vendors, and our communities.



RESULTS DRIVEN

Taking care of our people and partners in the areas of quality of life, service, and products. Focused on accurate, on-time delivery. Working with a proactive and positive attitude.



OUR EXPERTISE



ENGINEERING

Our engineering staff has experience in various design and manufacturing environments including leaf springs, tapered roller bearings, closed-die forgings, metal stampings, and CNC machining. Our resources include professional mechanical, quality, and metallurgical engineers. With these skills, we are striving every day to improve the overall cost and quality of the products we offer.



MANUFACTURING

The TRP companies take pride in the capabilities and efficiency of each piece of equipment used to manufacture our products. We strive to incorporate lean principles to keep costs down in our production facilities. Each facility takes pride in shipping quality products and maintains a quality system that builds the framework for verifying that we meet customer specifications.



INTERNATIONAL TRADE

With over 28 years of international trade experience and qualified TRP personnel working through liaison offices in Italy and China, we have the expertise necessary to communicate, consult, coordinate and execute the many facets of importing products to North America from abroad.



DISTRIBUTION

With state-of-the-art technology for order processing and fulfillment combined with strategically located distribution centers, we can effectively serve the requirements of customers across the U.S., as well as Canada and Mexico. Our constant attention to logistics and evaluation of carrier performance and pricing, assures the most efficient, cost-effective shipping methods resulting in faster delivery and lower total product costs.



TRP AGRICULTURAL DIVISION

TRP Agricultural Division is a supplier of spindles, hubs, drums, brakes, bearings, grease seals, dust caps and other related components to the agricultural market.

While we are committed to carrying an extensive inventory of the most popular items, we have the resources in place to work with customer designed products as well. By utilizing our domestic manufacturing capabilities, we provide a broad range of high-quality, competitively priced components.



COUPLERS WINCHES

EMCO INDUSTRIES

ABOUT EMCO INDUSTRIES

At EMCO Industries, we eat, live, and breathe spring steel. Manufacturing and distributing spring steel is our passion, which shows in our customer satisfaction.

With over thirty years in business, we have become well known for our complete line of leaf springs, agricultural components, and other heat-treated products. Our leaf springs can be found on heavy-duty trailers, RVs, boat trailers, open and closed utility trailers, specialty vehicles, agricultural equipment, and many other applications.

OUR HIGH-QUALITY PRODUCTS

EMCO Industries is a different kind of leaf spring manufacturer. We have the product knowledge and know-how to solve many spring-related problems, and we are the only domestic manufacturer with a company-owned facility in China. This allows us the flexibility to provide our customers with the best solution possible while maintaining control during

the entire process, from receiving your order until the product reaches your dock.

We have built our business on knowledge, continuous improvements, innovation, globalism, and professionalism. At the core of our company's approach lies lean manufacturing. This commitment drives us to continually seek opportunities to reduce expenses and enhance quality.

HEADQUARTERS AND FACILITIES

Our 95,000 square-foot manufacturing facility in Claremore, Oklahoma is centrally located in the U.S., minimizing freight charge and improving delivery times.

Our 200,000 square-foot Chinese manufacturing facility located in the Hebei Province, near Tianjin's port offers great access to ship products to the U.S., or wherever our customers require them. Our Chinese facility allows us to offer a blended supply solution to our customers.







In 2016, after merging with TRP International, LLC. with warehouse and distribution facilities in Elkhart, Indiana and Mesquite, Texas (Dallas county), together we are the ONLY spring supplier that can honestly say we have the solutions for your leaf spring needs.

UNWAVERING BACKBONE

From the earliest days of modem hauling trailers to their horse-drawn wagon forbearers, one component that has remained a constant is the highly functional and reliable leaf spring.

Trailers made for hauling come in three varieties: light-duty, medium-duty, and heavy-duty. Whatever size or type of load arc hauling, one thing they all have in common is that they need the right kind of suspension. Everything literally rides on the suspension. Leaf spring suspensions stand out as both reliable and cost-effective. They have been serving the hauling industry for years, with a proven track record.

THE CRAFTSMANSHIP

Manufacturing leaf springs correctly is a meticulous operation. EMCO begins with automotive-grade, high carbon specialty steel. The material is then specifically processed to create EMCO's leaf springs.

EMCO has advanced heat-treating capabilities and the steel undergoes rigorous preparation for its final purpose. It's the quality of steel and the sophisticated heat-treating processes that is at the heart of our leaf spring quality.


EMCO'S highly-automated operations seamlessly produce hundreds of thousands of leaf springs every month, meeting the demands of our customer base. It's this quality and capacity that has made EMCO the undisputed leading supplier of springs to the light-and medium-duty trailer market which has driven the expansion into the heavy-duty, 22.5K axle leaf spring segment.





AG Spindles

TRP offers a large selection of machined spindles in straight, double ended or fork to meet your requirements. For special applications, we offer machining capabilities of bar stock up to 30" in length and 5" in diameter through the spindle. Other capabilities include milling, drilling, tapping, and keyways.

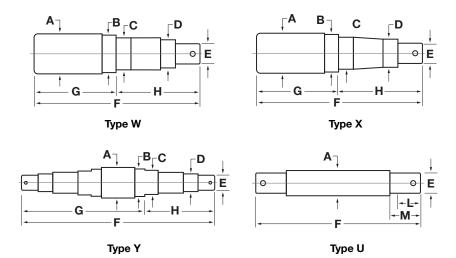

| PART | | DIMENSIONS | | | | | | | FITS | |
|---------------|-----|------------|--------|--------|--------|------------|--------|--------|-------|------------|
| NUMBER # | # | Α | В | С | D | E | F | G | Н | HUBS |
| SP-104125-085 | 1 | 1.250" | 1.250" | 1.000" | 1.000" | 3/4" - 16" | 8.50" | 4.03" | 4.47" | 10-4 |
| SP-124163-100 | 2 | 1.625" | 1.625" | 1.250" | 0.750" | 5/8" - 18" | 10.00" | 6.88" | 3.12" | 12-4 |
| SP-669163-100 | 3 | 1.625" | 1.500" | 1.250" | 0.750" | 5/8" - 18" | 10.00" | 5.34" | 4.66" | 669 |
| SP-633163-105 | 4 | 1.625" | 1.500" | 1.250" | 0.750" | 3/4" - 16" | 10.50" | 5.84" | 4.66" | 633 |
| SP-205163-100 | 5 | 1.625" | 1.625" | 1.250" | 0.750" | 5/8" - 18" | 10.00" | 6.00" | 4.00" | 20-5, 20-6 |
| SP-736163-105 | 6 | 1.625" | 1.500" | 1.250" | 0.750" | 3/4" - 16" | 10.50" | 5.84" | 4.66" | 736, 511 |
| SP-255175-125 | 7 | 1.750" | 1.750" | 1.375" | 1.250" | 3/4" - 16" | 12.50" | 8.66" | 3.84" | 25-5, 25-6 |
| SP-719175-115 | 8 | 1.750" | 1.500" | 1.375" | 1.250" | 7/8" - 14" | 11.50" | 7.13" | 4.38" | 719 |
| SP-306175-120 | 9 | 1.750" | 1.750" | 1.500" | 1.250" | 3/4" - 16" | 12.00" | 7.53" | 4.47" | 30-6 |
| SP-356200-130 | 10 | 2.000" | 2.000" | 1.625" | 1.250" | 3/4 - 16" | 13.00" | 7.81" | 5.19" | 35-6 |
| SP-888175-105 | 11 | 1.750" | 1.625" | 1.500" | 1.250" | 7/8 - 14" | 10.50" | 6.66" | 3.84" | 888 |
| SP-888200-125 | 12 | 2.000" | 1.625" | 1.500" | 1.250" | 7/8" - 14" | 12.50" | 8.66" | 3.84" | 888 |
| SP-888200-140 | 12A | 2.000" | 1.625" | 1.500" | 1.250" | 7/8" - 14" | 14.00" | 10.66" | 3.84" | 888 |
| SP-611175-140 | 13 | 1.750" | 1.750" | 1.500" | 1.250" | 1" - 14" | 14.00" | 10.00" | 4.00" | 611 |

[•] If you would like additional information regarding our machining capabilities, contact your sales representative



AG SPINDLES PART NUMBER DESCRIPTIONS

SPINDLE

-888200-NWC-125



| PART | DIMENSIONS | | | | | FITS | | | | |
|---------------|------------|--------|--------|--------|--------|------------|--------|--------|-------|---------------|
| NUMBER | # | Α | В | С | D | E | F | G | Н | HUBS |
| SP-887248-150 | 14 | 2.438" | 2.250" | 1.625" | 1.250" | 7/8" - 14" | 15.00" | _ | _ | 887, 890 |
| SP-783200-150 | 15 | 2.000" | 1.875" | 1.625" | 1.250" | 7/8" - 14" | 13.00" | 8.62" | 4.38" | 783 |
| SP-803213-155 | 16 | 2.125" | 2.000" | 1.790" | 1.375" | 7/8" - 14" | 15.50" | 9.39" | 6.11" | 778, 803, 813 |
| SP-458225-140 | 17 | 2.250" | 2.250" | 1.780" | 1.250" | 3/4" - 16" | 14.00" | 8.98" | 5.02" | 45-8 |
| SP-778213-155 | 18 | 2.125" | 2.000" | 1.790" | 1.375" | 7/8"- 14" | 15.50" | 9.39" | 6.11" | 778, 803, 813 |
| SP-819275-145 | 19 | 2.750" | 2.500" | 2.000" | 1.313" | 7/8" - 14" | 14.50" | 7.99" | 6.50" | 819, 821 |
| SP-608275-140 | 20 | 2.750" | 2.750" | 2.165" | 1.625" | 1"-14" | 14.00" | 8.53" | 5.47" | 60-8 |
| SP-758300-160 | 21 | 3.000" | 3.000" | 2.250" | 1.625" | 1"-14" | 16.00" | 9.41" | 6.59" | 75-8 |
| SP-808300-160 | 22 | 3.000" | 2.750" | 2.165" | 1.625" | 1"-14" | 16.00" | 9.50" | 6.50" | 80-8 |
| SP-871313-175 | 23 | 3.125" | 3.000" | 2.500" | 1.750" | 1-1/4"-12" | 17.50" | 10.88" | 6.63" | 871 |
| SP-873338-175 | 24 | 3.375" | 3.375" | 2.750" | 1.750" | 1-1/4"-12" | 17.50" | 10.77" | 6.73" | 873 |
| SP-873350-175 | 24A | 3.500" | 3.375" | 2.750" | 1.750" | 1-1/4"-12" | 17.50" | 10.77" | 6.73" | 873 |
| SP-881450-255 | 25 | 4.500" | 4.375" | 3.540" | 2.625" | 2"-12" | 26.50" | 18.50" | 8.00" | 881, 882, 981 |
| SP-22542 | 26 | 2.250" | 2.230" | 1.749" | 1.249" | 1"-14" | 11.00" | 6.00" | 5.00" | 660 |

[·] Specify CD for cold roll and HIR for hot roll when ordering

[•] All spindle part numbers noted above are based on Type W Spindle

[•] To add nut, washer and cotter pin to any spindle add "NWC" to the end of he spindle part number

[•] Additional spindles manufactured to customer specifications

[•] AG Spindles will be CD1045 material unless specified otherwise. Exception is SP-22542, which is HR1045 material.

AG HUB GLOSSARY

BOLT CIRCLE Normal diameter which bolt

holes are located.

CAPACITY

Load rating given to a hub based on 20 m.p.h. maximum speed, using recommended wheel offset.

PILOT

Normal diameter center hole that fits over hub or axle.

WHEEL **OFFSET**

NEGATIVE OFFSET, OR OUTSET:


Is when the center line of the wheel is located outboard or away from the face of the hub.


POSITIVE OFFSET, OR INSET:

Is when the center line of the wheel is located inboard or behind the face of the hub.

7FR0 0FFSFT-

Is when the center line of the wheel is located directly in line with the face of the hub.





HUB REFERENCE I = HUB = DRUM

BOLT ON .0" BOLT IRCLE

GREASE ZERK

AG HUB AND **DRUM PART** NUMBER **DESCRIPTIONS** AG-H8886600-1Z

AGRICULTURE

HUB REFERENCE H = HUB D = DRUM

BOLT ON .0" BOLT IRCLE

= THREADED

COMPLETE HUB **3REASE ZERK**

HUB IS NOT ASSEMBLED BEARINGS, DUS SAP AND SEAI


AG-H608B8800-2ZHA





AG Hubs - 4 Bolt

5.00" BOLT CIRCLE 3.62" PILOT





| HUB REFERENCE | 10-4* | 12-4 | 669 | 633 |
|-----------------------|------------------|------------------|------------------|------------------|
| Capacity Rating | 1000# | 1250# | 1250# | 1500# |
| Wheel Offset | 0.38" Negative | 0.38" Negative | 0.38" Negative | 0.38" Negative |
| Hub - Part # | AG-H1044500-1Z | AG-H1244500-1Z | AG-H6694500-1Z | AG-H6334500-1Z |
| Inner Cup - Part # | L-44610 | LM-67010 | LM-67010 | LM-67010 |
| Outer Cup - Part # | L-44610 | LM-11910 | LM-11910 | LM-11910 |
| Wheel Stud - Part# | N/A | N/A | N/A | N/A |
| Hub Assembly - Part # | AG-H1044500-1ZHA | AG-H1244500-1ZHA | AG-H6694500-1ZHA | AG-H6334500-1ZHA |
| Hub - Part # | AG-H1044500-1Z | AG-H1244500-1Z | AG-H6694500-1Z | AG-H6334500-1Z |
| Inner Cone - Part # | L-44643 | LM-67048 | LM-67048 | LM-67048 |
| Outer Cone - Part # | L-44643 | LM-11949 | LM-11949 | LM-11949 |
| Dust Cap - Part # | AG-DC-198Z | AG-DC-195Z | AG-DC-195Z | AG-DC-196ALTZ |
| Wheel Bolt - Part # | AG-WB1000Z | AG-WB1000Z | AG-WB1000Z | AG-WB1000Z |
| Wheel Nut - Part # | N/A | N/A | N/A | N/A |
| Grease Seal - Part # | AG-GS-19871250SL | AG-GS-23321625SL | AG-GS-23321500SL | AG-GS-23321500SL |

| SPINDLE | | | | | | | |
|---------------------------|---------------|---------------|---------------|---------------|--|--|--|
| Spindle - Part # | SP-104125-085 | SP-124163-100 | SP-669163-100 | SP-633163-105 | | | |
| Spindle # (see pg. 10-11) | 1 | 2 | 3 | 4 | | | |
| Nut - Part # | AG-FA-SN0750 | AG-FA-SN0625 | AG-FA-SN0625 | AG-FA-SN0750 | | | |
| Washer - Part # | AG-FA-SW0750 | AG-FA-SW0625 | AG-FA-SW0625 | AG-FA-SW0750 | | | |
| Cotter Pin - Part # | AG-FA-CP175 | AG-FA-CP175 | AG-FA-CP175 | AG-FA-CP175 | | | |
| Types Available | W,X,Y | W,X,Y | W,X,Y | W,X,Y | | | |

| HUB DIMENSION REFERENCE | | | | | | | |
|-------------------------|-------|-------|-------|-------|--|--|--|
| А | 2.53" | 1.16" | 1.16" | 2.05" | | | |
| В | 0.85" | 0.94" | 0.94" | 1.00" | | | |
| С | 1.00" | 0.96" | 0.88" | 1.10" | | | |
| D | 1.25" | 0.38" | 0.38" | 0.38" | | | |

[•] All Spindle parts numbers noted above are based on Type W Spindle. Additional spindles manufactured to customer specifications.


[•] All AG hubs include grease zerk


^{*}Non-stock items. Minimum order requirements and longer lead time will apply.



AG Hubs - 5 Bolt

5.50" BOLT CIRCLE 4.00" PILOT







| HUB REFERENCE | 20-5 | 736 | 511* | 25-5 | 719 |
|-----------------------|------------------|------------------|------------------|------------------|------------------|
| Capacity Rating | 2000# | 2000# | 2000# | 2500# | 2760# |
| Wheel Offset | 0.25" Negative |
| Hub - Part # | AG-H2055550-2Z | AG-H7365550-2Z | AG-H5115550-1Z | AG-H2555550-2Z | AG-H7195550-2Z |
| Inner Cup - Part # | LM-67010 | LM-67010 | LM-67010 | LM-48510 | LM-48510 |
| Outer Cup - Part # | LM-11910 | LM-11910 | LM-11910 | LM-67010 | LM-67010 |
| Wheel Stud - Part# | AG-WS1280Z | AG-WS1280Z | N/A | AG-WS1280Z | AG-WS1280Z |
| Hub Assembly - Part # | AG-H2055550-2ZHA | AG-H7365550-2ZHA | AG-H5115550-1ZHA | AG-H2555550-2ZHA | AG-H7195550-2ZHA |
| Hub - Part # | AG-H2055550-2Z | AG-H7365550-2Z | AG-H5115550-1Z | AG-H2555550-2Z | AG-H7195550-2Z |
| Inner Cone - Part # | LM-67048 | LM-67048 | LM-67048 | LM-48548 | LM-48548 |
| Outer Cone - Part # | LM-11949 | LM-11949 | LM-11949 | LM-67048 | LM-67048 |
| Dust Cap - Part # | AG-DC-195Z | AG-DC-195Z | AG-DC-195Z | AG-DC-244Z | AG-DC-244Z |
| Wheel Bolt - Part # | N/A | N/A | AG-WB1250Z | N/A | N/A |
| Wheel Nut - Part # | AG-WN1220Z | AG-WN1220Z | N/A | AG-WN1220Z | AG-WN1220Z |
| Grease Seal - Part # | AG-GS-23321625SL | AG-GS-23321500SL | AG-GS-23321500SL | AG-GS-27221750SL | AG-GS-26271500DL |

| SPINDLE | | | | | | |
|---------------------------|---------------|---------------|---------------|----------------|---------------|--|
| Spindle - Part # | SP-205163-100 | SP-736163-105 | SP-736163-105 | SP-255175-125 | SP-719175-115 | |
| Spindle # (see pg. 10-11) | 5 | 6 | 6 | 7 | 8 | |
| Nut - Part # | AG-FA-SN0625 | AG-FA-SN0750 | AG-FA-SN0750 | AG-FA-SN0750 | AG-FA-SN0875 | |
| Washer - Part # | AG-FA-SW0625 | AG-FA-SW0750 | AG-FA-SW0750 | AG-FA-SW0750-H | AG-FA-SW0875 | |
| Cotter Pin - Part # | AG-FA-CP175 | AG-FA-CP175 | AG-FA-CP175 | AG-FA-CP175 | AG-FA-CP175 | |
| Types Available | W,X,Y | W,X,Y | W,X,Y | W,X,Y | W,X,Y | |

| HUB DIMENSION REFERENCE | | | | | | | |
|-------------------------|-------|-------|-------|-------|-------|--|--|
| Α | 2.00" | 2.00" | 2.00" | 1.56" | 1.56" | | |
| В | 1.00" | 1.00" | 1.00" | 1.03" | 1.00" | | |
| C | 0.94" | 0.94" | 0.94" | 0.94" | 1.06" | | |
| D | 0.63" | 0.62" | 0.63" | 0.19" | 0.22" | | |

[•] All Spindle parts numbers noted above are based on Type W Spindle. Additional spindles manufactured to customer specifications.

[•] All AG hubs include grease zerk


^{*}Non-stock items. Minimum order requirements and longer lead time will apply.






AG Hubs - 6 Bolt

6.00" BOLT CIRCLE 4.62" PILOT







| HUB REFERENCE | 30-6 | 35-6 | 35-6 |
|-----------------------|------------------|------------------|------------------|
| Capacity Rating | 3000# | 3500# | 3500# |
| Wheel Offset | 1.12" Positive | 1.12" Positive | 1.12" Positive |
| Hub - Part # | AG-H3066600-2Z | AG-H3566600-1Z | AG-H3566600-2Z |
| Inner Cup - Part # | LM-29710 | LM-501310 | LM-501310 |
| Outer Cup - Part # | LM-67010 | LM-67010 | LM-67010 |
| Wheel Stud - Part# | AG-WS1280Z | N/A | AGOWS1400Z |
| Hub Assembly - Part # | AG-H3066600-2ZHA | AG-H3566600-1ZHA | AG-H3566600-2ZHA |
| Hub - Part # | AG-H3066600-2Z | AG-H3566600-1Z | AG-H3566600-2Z |
| Inner Cone - Part # | LM-29749 | LM-501349 | LM-501349 |
| Outer Cone - Part # | LM-67048 | LM-67048 | LM-67048 |
| Dust Cap - Part # | AG-DC-244Z | AG-DC-244Z | AG-DC-244Z |
| Wheel Bolt - Part # | N/A | AG-WB1125Z | N/A |
| Wheel Nut - Part # | AG-WN1220Z | N/A | AG-WN91618Z |
| Grease Seal - Part # | AG-GS-27221750SL | AG-GS-30662000SL | AG-GS-30662000SL |

| SPINDLE | | | | | | | |
|---------------------------|---------------|----------------|----------------|--|--|--|--|
| Spindle - Part # | SP-306175-120 | SP-356200-130 | SP-356200-130 | | | | |
| Spindle # (see pg. 10-11) | 9 | 10 | 11 | | | | |
| Nut - Part # | AG-FA-SN0750 | AG-FA-SN0750 | AG-FA-SN0750 | | | | |
| Washer - Part # | AG-FA-SW0875 | AG-FA-SW0750-H | AG-FA-SW0750-H | | | | |
| Cotter Pin - Part # | AG-FA-CP175 | AG-FA-CP175 | AG-FA-CP175 | | | | |
| Types Available | W,X,Y | W,X,Y | W,X,Y | | | | |

| HUB DIMENSION REFERENCE | | | | | | |
|-------------------------|-------|-------|-------|--|--|--|
| А | 2.19" | 2.84" | 2.84" | | | |
| В | 1.00" | 1.44" | 1.44" | | | |
| С | 0.94" | 0.97" | 0.97" | | | |
| D | 1.94" | 1.56" | 1.56" | | | |


- All Spindle parts numbers noted above are based on Type W Spindle. Additional spindles manufactured to customer specifications.
- All AG hubs include grease zerk


^{*}Non-stock items. Minimum order requirements and longer lead time will apply.



AG Hubs - 6 Bolt

6.00" BOLT CIRCLE 4.62" PILOT







| HUB REFERENCE | 888 | 888 | 611 |
|-----------------------|------------------|------------------|------------------|
| Capacity Rating | 3560# | 3560# | 3600# |
| Wheel Offset | 1.12" Positive | 1.12" Positive | 1.12" Positive |
| Hub - Part # | AG-H8886600-1Z | AG-H8886600-2Z | AG-H6116600-1Z |
| Inner Cup - Part # | JL-69310 | JL-69310 | LM-29710 |
| Outer Cup - Part # | LM-67010 | LM-67010 | LM-67010 |
| Wheel Stud - Part# | N/A | AG-WS1280Z | N/A |
| Hub Assembly - Part # | AG-H8886600-1ZHA | AG-H8886600-2ZHA | AG-H6116600-1ZHA |
| Hub - Part # | AG-H8886600-1Z | AG-H8886600-2Z | AG-H6116600-1Z |
| Inner Cone - Part # | JL-69349 | JL-69349 | LM-29749 |
| Outer Cone - Part # | LM-67048 | LM-67048 | LM-67048 |
| Dust Cap - Part # | AG-DC-244Z | AG-DC-244Z | AG-DC-244Z |
| Wheel Bolt - Part # | AG-WB1250Z | N/A | AG-WB1250Z |
| Wheel Nut - Part # | N/A | AG-WN1220Z | N/A |
| Grease Seal - Part # | AG-GS-25661625SL | AG-GS-25661625SL | AG-GS-27221750SL |

| SPINDLE | | | | | |
|---------------------------|---------------|---------------|---------------|--|--|
| Spindle - Part # | SP-888175-105 | SP-888200-125 | SP-611175-140 | | |
| Spindle # (see pg. 10-11) | 11, 12, 12A | 11, 12, 12A | 13 | | |
| Nut - Part # | AG-FA-SN0875 | AG-FA-SN0875 | AG-FA-SN1000 | | |
| Washer - Part # | AG-FA-SW0875 | AG-FA-SW0875 | AG-FA-SW1000 | | |
| Cotter Pin - Part # | AG-FA-CP175 | AG-FA-CP175 | AG-FA-CP205 | | |
| Types Available | W,X,Y | W,X,Y | W,X,Y | | |

| HUB DIMENSION REFERENCE | | | | | |
|-------------------------|-------|-------|-------|--|--|
| Α | 1.55" | 1.55" | 1.57" | | |
| В | 1.06" | 1.06" | 1.06" | | |
| C | 1.06" | 1.06" | 1.00" | | |
| D | 1.50" | 1.50" | 1.62" | | |
| Brake Bolt Pattern | N/A | N/A | N/A | | |

[•] All Spindle parts numbers noted above are based on Type W Spindle. Additional spindles manufactured to customer specifications.

[•] All AG hubs include grease zerk


^{*}Non-stock items. Minimum order requirements and longer lead time will apply.






AG Hubs - 6 Bolt

6.00" BOLT CIRCLE 4.62" PILOT







| HUB REFERENCE | 803 | 660 |
|-----------------------|------------------|----------------|
| Capacity Rating | 4910# | 3500# |
| Wheel Offset | 1.12" Positive | 1.12" Positive |
| Hub - Part # | AG-H8036600-1Z | AG-H660-42-2 |
| Inner Cup - Part # | 25520 | 25520 |
| Outer Cup - Part # | 25821 | 14276 |
| Wheel Stud - Part# | N/A | AG-WS-2310 |
| Hub Assembly - Part # | AG-H8036600-1ZHA | AG-H660-42-2HA |
| Hub - Part # | AG-H8036600-1Z | AG-H660-42-2 |
| Inner Cone - Part # | 25590 | 25580 |
| Outer Cone - Part # | 25877 | 14125A |
| Dust Cap - Part # | AG-DC-315Z | AG-DC-275 |
| Wheel Bolt - Part # | AG-WB1125Z | N/A |
| Wheel Nut - Part # | N/A | AG-WN91618Z |
| Grease Seal - Part # | AG-GS-36282000SL | GS-2250DL |

| SPINDLE | | | | | |
|---------------------------|----------------|--------------|--|--|--|
| Spindle - Part # | SP-803213-155 | SP-22542NW | | | |
| Spindle # (see pg. 10-11) | 16 | 26 | | | |
| Nut - Part # | AG-FA-SN0875 | AG-FA-SN100R | | | |
| Washer - Part # | AG-FA-SW0875-2 | AG-FA-SW100R | | | |
| Cotter Pin - Part # | AG-FA-CP175 | AG-FA-CP213 | | | |
| Types Available | W,X,Y | W,X,Y | | | |

| HUB DIMENSION REFERENCE | | | | | |
|-------------------------|-------|-------|--|--|--|
| A | 2.50" | 1.86" | | | |
| В | 1.38" | 1.47" | | | |
| C | 1.13" | 1.24" | | | |
| D | 1.75" | 0.57" | | | |
| Brake Bolt Pattern | N/A | N/A | | | |

[•] All Spindle parts numbers noted above are based on Type W Spindle. Additional spindles manufactured to customer specifications.


[•] All AG hubs include grease zerk


^{*}Non-stock items. Minimum order requirements and longer lead time will apply.



AG Hubs - 8 Bolt

8.00" BOLT CIRCLE 6.00" PILOT







| HUB REFERENCE | 45-8 | 778 | 813B | 819B |
|-----------------------|------------------|------------------|-------------------|-------------------|
| Capacity Rating | 4500# | 4910# | 4910# | 5790# |
| Wheel Offset | 1.12" Positive | 1.50" Negative | 1.50" Negative | 1.50" Negative |
| Hub - Part # | AG-H4588800-2Z | AG-H7788800-1Z | AG-H813B8800-2Z | AG-H819B8800-2Z |
| Inner Cup - Part # | LM-603011 | 25520 | 25520 | 3720 |
| Outer Cup - Part # | LM-67010 | 25821 | 25821 | 2720 |
| Wheel Stud - Part# | AG-WS1625Z | N/A | AG-WS2310Z | AG-WS2310Z |
| Hub Assembly - Part # | AG-H4588800-2ZHA | AG-H7788800-1ZHA | AG-H813B8800-2ZHA | AG-H819B8800-2ZHA |
| Hub - Part # | AG-H4588800-2Z | AG-H7788800-1Z | AG-H813B8800-2Z | AG-H819B8800-2Z |
| Inner Cone - Part # | LM-603049 | 25590 | 25590 | 3780 |
| Outer Cone - Part # | LM-67048 | 25877 | 25877 | 2790 |
| Dust Cap - Part # | AG-DC-244Z | AG-DC-315Z | AG-DC-315Z | AG-DC-315Z |
| Wheel Bolt - Part # | N/A | AG-WB1125Z | N/A | N/A |
| Wheel Nut - Part # | AG-WN5818Z | N/A | AG-WN91618Z | AG-WN91618Z |
| Grease Seal - Part # | AG-GS-30662250SL | AG-GS-36282000SL | AG-GS-36282000SL | AG-GS-37562500SL |

| SPINDLE | | | | | |
|---------------------------|----------------|----------------|----------------|----------------|--|
| Spindle - Part # | SP-458225-140 | SP-778213-155 | SP-778213-155 | SP-819275-145 | |
| Spindle # (see pg. 10-11) | 17 | 18 | 18 | 19 | |
| Nut - Part # | AG-FA-SN0750 | AG-FA-SN0875 | AG-FA-SN0875 | AG-FA-SN0875 | |
| Washer - Part # | AG-FA-SW0750-H | AG-FA-SW0875-2 | AG-FA-SW0875-2 | AG-FA-SW0875-2 | |
| Cotter Pin - Part # | AG-FA-CP175 | AG-FA-CP175 | AG-FA-CP175 | AG-FA-CP175 | |
| Types Available | W,X,Y | W,X,Y | W,X,Y | W,X,Y | |

| HUB DIMENSION REFERENCE | | | | | |
|-------------------------|-------|-------|----------------------|----------------------|--|
| Α | 2.83" | 2.50" | 2.50" | 2.44" | |
| В | 1.26" | 1.75" | 1.75" | 2.41" | |
| С | 0.97" | 1.12" | 1.12" | 1.25" | |
| D | 1.38" | 0.88" | 0.88" | 1.25" | |
| Brake Bolt Pattern | N/A | N/A | 8-8.0" / 5.75" Pilot | 8-8.0" / 5.75" Pilot | |

[•] All Spindle parts numbers noted above are based on Type W Spindle. Additional spindles manufactured to customer specifications.

[•] All AG hubs include grease zerk


^{*}Non-stock items. Minimum order requirements and longer lead time will apply.






AG Hubs - 8 Bolt

8.00" BOLT CIRCLE 6.00" PILOT







| HUB REFERENCE | 821 | 60-8B | 75-8B | 80-8B |
|-----------------------|------------------|-------------------|-------------------|-------------------|
| Capacity Rating | 5790# | 6000# | 7500# | 8000# |
| Wheel Offset | 1.50" Negative | 0.38" Positive | 0.38" Negative | 0.38" Positive |
| Hub - Part # | AG-H8218800-1Z | AG-H608B8800-2Z | AG-H758B8800-2Z | AG-H808B8800-2Z |
| Inner Cup - Part # | 3720 | JLM-506810 | 382A | JLM-506810 |
| Outer Cup - Part # | 2720 | LM-501310 | LM-501310 | LM-501310 |
| Wheel Stud - Part# | N/A | AG-WS1625Z | AG-WS1625Z | AG-WS1500Z |
| Hub Assembly - Part # | AG-H8218800-1ZHA | AG-H608B8800-2ZHA | AG-H758B8800-2ZHA | AG-H808B8800-2ZHA |
| Hub - Part # | AG-H8218800-1Z | AG-H608B8800-2Z | AG-H758B8800-2Z | AG-H808B8800-2Z |
| Inner Cone - Part # | 3780 | JLM-506849 | 387AS | JLM-506849 |
| Outer Cone - Part # | 2790 | LM-501349 | LM-501349 | LM-501349 |
| Dust Cap - Part # | AG-DC-315Z | AG-DC-313Z | AG-DC-313Z | AG-DC-313Z |
| Wheel Bolt - Part # | AG-WB1500Z | N/A | N/A | N/A |
| Wheel Nut - Part # | N/A | AG-WN5818Z | AG-WN5818Z | AG-WN5818Z |
| Grease Seal - Part # | AG-GS-37562500SL | AG-GS-37562750SL | AG-GS-40083000SL | AG-GS-37562750SL |

| SPINDLE | | | | | |
|---------------------------|----------------|----------------|----------------|----------------|--|
| Spindle - Part # | SP-819275-145 | SP-608275-140 | SP-758300-160 | SP-808300-160 | |
| Spindle # (see pg. 10-11) | 19 | 20 | 21 | 22 | |
| Nut - Part # | AG-FA-SN0875 | AG-FA-SN1000 | AG-FA-SN1000 | AG-FA-SN1000 | |
| Washer - Part # | AG-FA-SW0875-2 | AG-FA-SW1055-H | AG-FA-SW1055-H | AG-FA-SW1055-H | |
| Cotter Pin - Part # | AG-FA-CP175 | AG-FA-CP205 | AG-FA-CP205 | AG-FA-CP205 | |
| Types Available | W,X,Y | W,X,Y | W,X,Y | W,X,Y | |

| HUB DIMENSION REFERENCE | | | | | |
|-------------------------|-------|-----------------------|----------------------|-----------------------|--|
| А | 2.44" | 2.56" | 3.77" | 2.72" | |
| В | 2.41" | 1.50" | 1.52" | 1.50" | |
| С | 1.25" | 1.37" | 1.39" | 1.37" | |
| D | 1.34" | 0.75" | 1.66" | 0.86" | |
| Brake Bolt Pattern | N/A | 8-5.5" / 4.375" Pilot | 8-5.5" / 4.50" Pilot | 8-5.5" / 4.375" Pilot | |

[•] All Spindle parts numbers noted above are based on Type W Spindle. Additional spindles manufactured to customer specifications.


[•] All AG hubs include grease zerk


^{*}Non-stock items. Minimum order requirements and longer lead time will apply.



AG Hubs - 10 Bolt

11.25" BOLT CIRCLE 8.69" PILOT







| HUB REFERENCE | 871B | 873B | | |
|-----------------------|--------------------------|--------------------------|--|--|
| Capacity Rating | 12,000# | 15,000# | | |
| Wheel Offset | 0.00" | 0.00" | | |
| Hub - Part # | AG-H871B101125-2Z | AG-H873B101125-2Z | | |
| Inner Cup - Part # | 39520 | 33462 | | |
| Outer Cup - Part # | 453A | 453A | | |
| Wheel Stud - Part # | AG-WS1813Z | AG-WS1813Z | | |
| Hub Assembly - Part # | AG-H871B101125-2ZHA | AG-H873B101125-2ZHA | | |
| Hub - Part # | AG-H871B101125-2Z | AG-H873B101125-2Z | | |
| Inner Cone - Part # | 39585 | 33275 | | |
| Outer Cone - Part # | 460 | 460 | | |
| Dust Cap - Part # | AG-DC-575Z*** (W/SCREWS) | AG-DC-575Z*** (W/SCREWS) | | |
| Wheel Bolt - Part # | N/A | N/A | | |
| Wheel Nut - Part # | AG-WNF3416Z | AG-WNF3416Z | | |
| Grease Seal - Part # | AG-GS-45053000SL | AG-GS-46313375SL | | |

| SPINDLE | | | | |
|---------------------------|---------------|---------------|--|--|
| Spindle - Part # | SP-871313-175 | SP-873338-175 | | |
| Spindle # (see pg. 10-11) | 23 | 24, 24A | | |
| Nut - Part # | AG-FA-SN1250 | AG-FA-SN1250 | | |
| Washer - Part # | AG-FA-SW1375 | AG-FA-SW1375 | | |
| Cotter Pin - Part # | AG-FA-CP200 | AG-FA-CP200 | | |
| Types Available | W | W | | |

| HUB DIMENSION REFERENCE | | | |
|-------------------------|---------|---------|--|
| A | 2.81" | 2.81" | |
| В | 1.75" | 1.75" | |
| C | 1.25" | 1.25" | |
| D | 0.06" | 0.06" | |
| Brake Bolt Pattern | 6-8.25" | 6-8.25" | |

- All Spindle parts numbers noted above are based on Type W Spindle. Additional spindles manufactured to customer specifications.
- All AG hubs include grease zerk

^{***}When ordering the compete assembly, the dust cap includes 4 each AG-FA-DC516 dust cap screws.


^{*}Non-stock items. Minimum order requirements and longer lead time will apply.






AG Hubs - 10 Bolt

13.19" BOLT CIRCLE 11.007" PILOT







| HUB REFERENCE | 881 | 882* | 981* | | |
|---|---|--------------------------|------------------------|--|--|
| Capacity Rating | 20,000# | 22,500# | 22,500# | | |
| Wheel Offset | 1.50" Positive | 1.50" Positive | 1.50" Positive | | |
| Hub - Part # | AG-H881101319-2Z | AG-H882101319-2Z | AG-H981101319-2Z | | |
| Inner Cup - Part # | HM-218210 | HM-218210 | HM-218210 | | |
| Outer Cup - Part # | HM-212011 | HM-212011 HM-212011 HM | | | |
| Wheel Stud - Part# | AG-WS1813Z | AG-WS1813Z AG-WS1813Z AG | | | |
| lub Assembly - Part # AG-H881101319-2ZF | | AG-H882101319-2ZHA | AG-H981101319-2ZHA | | |
| Hub - Part # | AG-H881101319-2Z | AG-H882101319-2Z | AG-H981101319-2Z | | |
| Inner Cone - Part # | HM-218248 | HM-218248 | HM-218248 | | |
| Outer Cone - Part # | HM-212049 | HM-212049 | HM-212049 | | |
| Dust Cap - Part # | AG-DC-613Z* (W/SCREWS) AG-DC-613Z* (W/SCREWS) | | AG-DC-613Z* (W/SCREWS) | | |
| Wheel Bolt - Part # | N/A N/A | | N/A | | |
| Wheel Nut - Part # | AG-WNF3416Z | AG-WNF3416Z AG-WNF3416Z | | | |
| Grease Seal - Part # | AG-GS-60074375SL | AG-GS-60074375SL | AG-GS-60074375SL | | |

| SPINDLE | | | | |
|---------------------------|---------------|---------------|---------------|--|
| Spindle - Part # | SP-881450-265 | SP-881450-265 | SP-881450-265 | |
| Spindle # (see pg. 10-11) | 25 | 25 | 25 | |
| Nut - Part # | AG-FA-SN2000 | AG-FA-SN2000 | AG-FA-SN2000 | |
| Washer - Part # | AG-FA-SW2125 | AG-FA-SW2125 | AG-FA-SW2125 | |
| Cotter Pin - Part # | AG-FA-CP350 | AG-FA-CP350 | AG-FA-CP350 | |
| Types Available | W | W | W | |

| HUB DIMENSION REFERENCE | | | | |
|-------------------------|-------|-------|-------|--|
| Α | 3.25" | 3.25" | 3.25" | |
| В | 2.28" | 2.28" | 2.28" | |
| С | 1.72" | 1.72" | 1.72" | |
| D | 1.66" | 1.66" | 1.66" | |
| Brake Bolt Pattern | N/A | N/A | N/A | |

[•] All Spindle parts numbers noted above are based on Type W Spindle. Additional spindles manufactured to customer specifications.


[•] All AG hubs include grease zerk

^{***}When ordering the compete assembly, the dust cap includes 4 each AG-FA-DC516 dust cap screws.

^{*}Non-stock items. Minimum order requirements and longer lead time will apply.

AG Brake Drums

TYPE A / TYPE B





| DRUM REFERENCE | DRUM SIZE | TYPE | BOLT CIRCLE | BOLT HOLE DIAMETER | PILOT | WEIGHT |
|-----------------|--------------|------|----------------|-----------------------|--------|--------|
| AG-D13-6554375* | 13" | А | 6-5.5" | 0.531" | 4.375" | 24# |
| AG-D13-8554375 | 13" | А | 8-5.5" | 0.531" | 4.375" | 24# |
| AG-D13-8554500 | 13" | А | 8-5.5" | 0.531" | 4.500" | 24# |
| AG-D13-8805750 | 13" | В | 8-8.0" | 0.625" | 5.750" | 22# |

AG-D138805750

AGRICULTURE

- · AG hub capacities are based on tractor speeds up to 20 mph and using recommended wheel offset.
- *Non-stock items. Minimum order requirements and longer lead time will apply.

The specifications and dimensions above are for reference only.

AG Hydraulic Brakes





| PART NUMBER | DESCRIPTION | FLANGE BOLT |
|----------------|--|-------------|
| AG-BK-13HFB-RH | Hydraulic Brake, 13" x 2-1/2" Free Backing, E-Coat, RH | 4 |
| AG-BK-13HFB-LH | Hydraulic Brake, 13" x 2-1/2" Free Backing, E-Coat, LH | 4 |
| BK-23510 | Hydraulic Brake, 12" x 2" Uni-Servo, E-Coat, RH | 5 |
| BK-23511 | Hydraulic Brake, 12" x 2" Uni-Servo, E-Coat, LH | 5 |
| BK-42028 | Hydraulic Brake, 12" x 2" Free Backing, E-Coat, RH | 5 |
| BK-42029 | Hydraulic Brake, 12" x 2" Free Backing, E-Coat, LH | 5 |
| BK-42028X | Hydraulic Brake, 12" x 2" Free Backing, Dacromet, RH | 5 |
| BK-42029X | Hydraulic Brake, 12" x 2" Free Backing, Dacromet, LH | 5 |

^{*}Brake flanges are customized to your requirements. *Non-stock items. Minimum order requirements and longer lead time will apply.

[•] AG hub capacities are based on tractor speeds up to 20 mph and using recommended wheel offset. The specifications and dimensions above are for reference only.



Tapered Roller Bearings





| PART NUMBER | DESCRIPTION | CONE ID | CUP OD | BOX QUANTITY | BOX WEIGHT | CASE QUANTITY | CASE WEIGHT |
|----------------|-------------|---------|---------|-----------------|---------------|------------------|----------------|
| L-44643 | Cone | 1.0000" | _ | 297 pc. | 59 lb. | 10,692 pc. | 2,124 lb. |
| L-44610 | Cup | _ | 1.9800" | 297 pc. | 27 lb. | 10,692 pc. | 972 lb. |
| LM-67048 | Cone | 1.2500" | - | 184 pc. | 49 lb. | 6,624 pc. | 1,764 lb. |
| LM-67101 | Cup | _ | 2.3280" | 184 pc. | 25 lb. | 6,624 pc. | 900 lb. |
| 25590 | Cone | 1.7960" | _ | 60 pc. | 45 lb. | 2,160 pc. | 1,630 lb. |
| 25520 | Cup | _ | 3.2650" | 55 pc. | 26 lb. | 1,980 pc. | 936 lb. |
| LM-11949 | Cone | 0.7500" | _ | 360 pc. | 65 lb. | 12,960 pc. | 2,365 lb. |
| LM-11910 | Cup | _ | 1.7810" | 360 pc. | 36 lb. | 12,960 pc. | 1,320 lb. |
| LM-48548 | Cone | 1.3750" | _ | 128 pc. | 53 lb. | 4,608 pc. | 1,908 lb. |
| LM-48510 | Cup | _ | 2.5625" | 192 pc. | 38 lb. | 6,912 pc. | 1,368 lb. |
| LM-501349 | Cone | 1.6250" | _ | 130 pc. | 60 lb. | 4,680 pc. | 2,160 lb. |
| LM-501310 | Cup | _ | 2.8910" | 150 pc. | 39 lb. | 5,400 pc. | 1,404 lb. |
| JL-69349 | Cone | 1.4961" | - | 175 pc. | 53 lb. | 6,300 pc. | 1,908 lb. |
| JL-69310 | Cup | _ | 2.4803" | 192 pc. | 32 lb. | 6,912 pc. | 1,152 lb. |
| 33275 | Cone | 2.7500" | _ | _ | _ | _ | _ |
| 33462 | Cup | _ | 4.6250" | _ | _ | _ | _ |
| HM-218248 | Cone | 3.5423" | _ | 10 pc. | 40 lb. | 360 pc. | 1,440 lb. |
| HM-218210 | Cup | _ | 5.7864" | 10 pc. | 20 lb. | 360 pc. | 720 lb. |
| HM-212049 | Cone | 2.6250" | _ | 14 pc. | 45 lb. | 504 pc. | 1,620 lb. |
| HM-212011 | Cup | _ | 4.8125" | 24 pc. | 34 lb. | 864 pc. | 1,224 lb. |
| LM-29749 | Cone | 1.5000" | _ | 120 pc. | 42 lb. | 4,320 pc. | 1,520 b. |
| LM-29710 | Cup | _ | 2.5625" | 256 pc. | 44 lb. | 9,216 pc. | 1,602 lb. |
| LM-603049 | Cone | 1.7812" | _ | 84 pc. | 46 lb. | 3,024 pc. | 1,656 lb. |
| LM-603011 | Cup | _ | 3.0625" | 192 pc. | 50 lb. | 6,912 pc. | 1,808 lb. |
| 25877 | Cone | 1.3750" | _ | 84 pc. | 57 lb. | 3,024 pc. | 2,052 lb. |
| 25821 | Cup | _ | 2.8750 | 168 pc. | 62 lb. | 6,048 pc. | 2,232 lb. |
| 3780 | Cone | 2.0000 | _ | 45 pc. | 56 lb. | 1,620 pc. | 2,016 lb. |
| 3720 | Cup | _ | 3.6718 | 96 pc. | 62 lb. | 3,456 pc. | 2,232 lb. |
| 2790 | Cone | 1.3125 | _ | 84 pc. | 59 lb. | 3,024 pc. | 2,130 lb. |
| 2720 | Cup | _ | 3.0000" | 168 pc. | 69 lb. | 6,048 pc. | 2,486 lb. |
| 387AS | Cone | 2.5000" | _ | 84 pc. | 77 lb. | 3,024 pc. | 2,794 lb. |
| 382A | Cup | _ | 3.8125" | 144 pc. | 57 lb. | 5,184 pc. | 2,052 lb. |
| 39585 | Cone | 2.5000" | _ | 14 pc. | 28 lb. | 504 pc. | 1,008 lb. |
| 39520 | Cup | _ | 4.4375" | 40 pc. | 32 lb. | 1,440 pc. | 2,520 lb. |
| JLM-506849 | Cone | 2.1654" | _ | 84 pc. | 70 lb. | 3,024 pc. | 2,520 lb. |
| JLM-506810 | Cup | _ | 3.5433" | 144 pc. | 59 lb. | 5,184 pc. | 2,124 lb. |
| 460 | Cone | 1.7500" | - | 32 pc. | 65 lb. | 1,152 pc. | 2,350 lb. |
| 453 | Cup | _ | 4.2500" | 72 pc. | 66 lb. | 2,592 pc. | 2,400 lb. |
| 14125A | Cone | 1.2500" | - | 108 pc. | 40 lb. | 3,888 pc. | 1,440 lb. |
| 14276 | Cup | _ | 2.7170" | 108 pc. | 19 lb. | 3,888 pc. | 684 lb. |

[•] Other tapered roller bearings available upon request. The specifications and dimensions above are for reference only.

AG Grease Seals





| PART NUMBER | SHAFT DIAMETER | BORE DIAMETER | SEAL OD. | SEAL WIDTH | REF. NUMBER | BOX QUANTITY | BOX WEIGHT |
|------------------|-------------------|------------------|-------------|---------------|----------------|-----------------|---------------|
| AG-GS-19871250SL | 1.250" | 1.983" | 1.987" | 0.250" | 12437 | 300 pc. | 16 lb. |
| AG-GS 23321500SL | 1.500" | 2.328" | 2.332" | 0.390" | 14975 | 300 pc. | 16 lb. |
| AG-GS-26271500DL | 1.500" | 2.623" | 2.627" | 0.250" | 15190 | 300 pc. | 19 lb. |
| AG-GS-23321625SL | 1.625" | 2.328" | 2.332" | 0.438" | 16069 | 300 pc. | 18 lb. |
| AG-GS-25661625SL | 1.625" | 2.562" | 2.566" | 0.438" | 16289 | 300 pc. | 23 lb. |
| AG-GS-27221750SL | 1.750" | 2.718" | 2.722" | 0.359" | 17617 | 300 pc. | 23 lb. |
| AG-GS-30051875SL | 1.875" | 3.000" | 3.005" | 0.250" | 18823 | 300 pc. | 31 lb. |
| AG-GS-30662000SL | 2.000" | 3.061" | 3.066" | 0.250" | 20044 | 300 pc. | 25 lb. |
| AG-GS-36282000SL | 2.000" | 3.623" | 3.628" | 0.250" | 20148 | 300 pc. | 25 lb. |
| AG-GS-30052250SL | 2.250" | 3.000" | 3.005" | 0.250" | 22368 | 300 pc. | 25 lb. |
| AG-GS-30662250SL | 2.250" | 3.061" | 3.066" | 0.250" | 22392 | 300 pc. | 34 lb. |
| AG-GS-37562500SL | 2.500" | 3.751" | 3.756" | 0.438" | 25091 | 300 pc. | 34 lb. |
| AG-GS-37562750SL | 2.750" | 3.751" | 3.756" | 0.250" | 27394 | 200 pc. | 34 lb. |
| AG-GS-40083000SL | 3.000" | 4.003" | 4.008" | 0.250" | 29968 | 200 pc. | 34 lb. |
| AG-GS-45053000SL | 3.000" | 4.500" | 4.505" | 0.438" | 30087 | 150 pc. | 31 lb. |
| AG-GS-46313375SL | 3.375" | 4.626" | 4.631" | 0.438" | 33772 | 150 pc. | 31 lb. |
| AG-GS-60074375SL | 4.375" | 6.001" | 6.007" | 0.500" | 43771 | 70 pc. | 36 lb. |
| AG-GS-2250DL | 2.250" | 3.371" | 3.376" | 0.375" | 22333TB | 300 pc. | 31 lb. |

[•] Material: Rubber= Nitrile Buna - 70 durometer compound

^{*}Non-stock items. Minimum order requirements and longer lead time will apply. Double or Triple Lip are special order.










| PART | PART HUBS USING DUST CAP | | DIMENSIONS | | | вох | вох |
|---------------|--|-------|------------|-------|------|-----------|---------|
| NUMBER | HUBS USING DUST CAP | Α | В | С | TYPE | QUANTITY | WEIGHT |
| AG-DC-195Z | 12-4, 669, 20-5, 736, 511, 20-6 | 1.95" | 1.38" | 0.34" | А | 1,000 pc. | 88 lb. |
| AG-DC-196ALTZ | 633 (Same as part AG-DC-2030Z) | 1.96" | 0.95" | 0.33" | С | 1,000 pc. | 85 lb. |
| AG-DC-198Z* | 10-4 | 1.99" | 0.95" | 0.37" | В | 1,000 pc. | 80 lb. |
| AG-DC-244Z | 25-5, 719, 25-6, 30-6, 35-6, 888, 611, 887, 783, 45-8, 890 | 2.44" | 1.25" | 0.31" | А | 500 pc. | 89 lb. |
| AG-DC-275Z | 660 | 2.72" | 1.28" | 0.33" | С | 430 pc. | 69 lb. |
| AG-DC-313Z | 60-8, 75-8, 80-8 | 3.13" | 1.31" | 0.31" | С | 250 pc. | 75 lb. |
| AG-DC-315Z | 803, 778, 819, 821 | 3.16" | 1.38" | 0.30" | С | 250 pc. | 78 lb. |
| AG-DC-575Z*** | 871, 873 | 5.00" | 1.75" | 3.69" | D | 100 pc. | 195 lb. |
| AG-DC-613Z*** | 881, 882, 981 | 5.75" | 2.25" | 4,50" | D | 100 pc. | 100 lb. |

| PART NUMBER | DESCRIPTION | |
|----------------|---|--|
| AG-FA-DC516*** | Dust Cap Screw, 5/16" - 18" x 1/2" Grade 5 (May be used with AG-DC-575Z & AG-DC-613Z) | |








Type B С \Box Type D

- Material: Zinc-coated steel material thickness 16 gauge, except for AG-DC-198Z which is 22 gauge.
- *Non-stock items. Minimum order requirements and longer lead time will apply.
- ***When ordering the complete Assembly, the dust cap includes 4 each AG-FA-DC516 dust cap screws. If ordering AG-DC-575Z or AG-DC-613Z does not include the AG-FA-DC516 screw, must order 4 per dust cap.

Spindle Fasteners

Flat Round Spindle Washers


| PART | | DIMENSION | S | вох | вох |
|----------------|-------|-----------|--------|-----------|--------|
| NUMBER | Α | В | С | QUANTITY | WEIGHT |
| AG-FA-SW0750 | 1.47" | 0.812" | 0.134" | 1,120 pc. | 46 lb. |
| AG-FA-SW100R | 1.67" | 1.000" | 0.130" | 1,000 pc. | 35 lb. |
| AG-FA-SW0625 | 1.75" | 0.688" | 0.134" | 650 pc. | 45 lb. |
| AG FA-SW0875 | 1.75" | 0.938" | 0.134" | 800 pc. | 53 lb. |
| AG-FA-SW0750-H | 2.00" | 0.812" | 0.148" | 500 pc. | 46 lb. |
| AG-FA-SW1000 | 2.00" | 1.062" | 0.134" | 550 pc. | 40 lb. |
| AG-FA-SW0875-2 | 2.25" | 0.875" | 0.165" | 350 pc. | 50 lb. |
| AG-FA-SW1055-H | 2.50" | 1.055" | 0.185" | 100 pc. | 48 lb. |
| AG-FA-SW1375 | 3.00" | 1.375" | 0.165" | 100 pc. | 23 lb. |
| AG-FA-SW2125 | 3.75" | 2.125" | 0.185" | 100 pc. | 59 lb. |



Spindle Nuts


| PART | THREAD | ı | DIMENSIO | NS | вох | вох | |
|--------------|--------------|-------|----------|-------|----------|--------|--|
| NUMBER | ITREAD | Α | В | С | QUANTITY | WEIGHT | |
| AG-FA-SN0625 | 5/8" -18" | 0.93" | 0.63" | 0.54" | 800 pc. | 44 lb. | |
| AG-FA-SN0750 | 3/4" - 16" | 1.11" | 0.75" | 0.64" | 500 pc. | 52 lb. | |
| AG-FA-SN0875 | 7/8" - 14" | 1.29" | 0.88" | 0.75" | 300 pc. | 47 lb. | |
| AG-FA-SN100R | 1" - 14" | 1.46" | 1.00" | 0.55" | 300 pc. | 42 lb. | |
| AG-FA-SN1000 | 1" - 14" | 1.50" | 1.00" | 0.83" | 200 pc. | 49 lb. | |
| AG-FA-SN1250 | 1-1/4" - 12" | 1.85" | 1.25" | 1.06" | 100 pc. | 48 lb. | |
| AG-FA-SN2000 | 2" - 12" | 2.90" | 2.00" | 1.25" | 25 pc. | 48 lb. | |





Cotter Pins

| PART | SIZE | DIME | NSIONS | вох | вох | |
|-------------|-------|--------|--------|-----------|--------|--|
| NUMBER | SIZL | Α | В | QUANTITY | WEIGHT | |
| AG-FA-CP75 | 5/32" | 1.750" | 0.31" | 1,000 pc. | 11 lb. | |
| AG-FA-CP205 | 7/32" | 2.000" | 0.44" | 250 pc. | 8 lb. | |
| AG-FA-CP200 | 1/4" | 2.000" | 0.50" | 1,000 pc. | 16 lb. | |
| AG-FA-CP213 | 1/8" | 2.125" | 0.25" | 2,000 pc. | 12 lb. | |
| AG-FA-CP350 | 5/16" | 3.500" | 0.62" | 1,000 pc. | 20 lb. | |





Fasteners

Wheel Bolts

| PART NUMBER | DESCRIPTION | DIMENSIONS |
|-------------|----------------------------------|--------------------|
| AG-W81000Z | Wheel Bolt, Hex Head, 90 Degrees | 1.50" x 1/2" - 20 |
| AG-WB1500Z | Wheel Bolt, Hex Head, 90 Degrees | 1.50" x 9/16" - 18 |
| AG-WB1125Z | Wheel Bolt, Hex Head, 90 Degrees | 1.63" x 9/16" - 18 |
| AG-WB1250Z | Wheel Bolt, Hex Head, 90 Degrees | 1.75" x 1/2" - 20 |



Wheel Studs

| PART NUMBER | DESCRIPTION | DIMENSIONS |
|-------------|-----------------------|--------------------|
| AG-WS1750Z | Wheel Stud, GR8, Zinc | 1.75" x 9/16" - 18 |
| AG-WS1813Z | Wheel Stud, GR8, Zinc | 1.81" x 3/4" - 16 |
| AG-WS1280Z | Wheel Stud, GR8, Zinc | 2.06" x 1/2" - 20 |
| FA-WS-2310 | Wheel Stud, GR8, Zinc | 2.31" x 9/16" - 18 |
| AG-WS1400Z | Wheel Stud, GR8, Zinc | 2.46" x 9/16" - 18 |
| AG-WS1625Z | Wheel Stud, GR8, Zinc | 2.53" x 5/8" - 18 |



Wheel Nuts


| PART NUMBER | DESCRIPTION | DIMENSIONS |
|--------------|---------------------------------|------------|
| AG-WN1220Z | Wheel Nut, 90 Degrees GR5, Zinc | 1/2" - 20 |
| AG-WN91618Z | Wheel Nut, 90 Degrees GR5, Zinc | 9/16" - 18 |
| AG-WNF5818Z* | Wheel Nut Flanged GR5, Zinc | 5/8" - 18 |
| FA-6-109 | Wheel Nut, 90 Degrees GR5, Zinc | 5/8" - 16 |



The specifications and dimensions above are for reference only.

U-Bolts

Custom U-Bolts are available upon request. Contact your TRP Account Executive with dimensions A, B and C. Specify course or fine thread size, plain, white zinc or yellow zinc.







^{*}Non-stock items. Minimum order requirements and longer lead time will apply.

Trailer Frame Jacks

A-Frame Jacks

| PART NUMBER | LIFT CAP. | TRAVEL | R | E | DESCRIPTION | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|----------------|--------------|--------|-----|-----|--|-------------|--------------|-------------|------------|
| TR-JTW2K-14 | 2,000 lb. | 14" | 19" | 33" | Drop Through Bolt-On or Weld-On, Black | 7.70 lb. | 220 pc. | 1,738 lb. | TJA-2000-B |
| TR-JTW5K-15 | 5,000 lb. | 15" | 19" | 34" | Drop Through Bolt-On or Weld-On, Black | 10.17 lb. | 220 pc. | 2,237 lb. | TJA-5000-B |



Swivel, Weld-On Jacks

| PART NUMBER | LIFT CAP. | TRAVEL | R | E | DESCRIPTION | UNIT WT. | CASE QTY. | CASE WT. | REF. # |
|----------------|--------------|--------|-----|-----|--|-------------|--------------|-------------|-------------|
| TR-JTWR2K-10 | 2,000 lb. | 10" | 11" | 21" | Top Wind Swivel, Retaining Ring Mount, Black | 11.50 lb. | 150 pc. | 1,642 lb. | TJB-2001-B |
| TR-JTWR2K-15 | 2,000 lb. | 15" | 11" | 26" | Top Wind Swivel, Retaining Ring Mount, Black | 13.50 lb. | 120 pc. | 1,663 lb. | TJB-2002-B |
| TR-JSWR2K-10 | 2,000 lb. | 10" | 11" | 21" | Side Wind Swivel, Retaining Ring Mount, Black | 14.30 lb. | 150 pc. | 2,185 lb. | TJB-2001S-B |
| TR-JSWR2K-15 | 2,000 lb. | 15" | 11" | 26" | Side Wind Swivel, Retaining Ring Mount, Black | 16.50 lb. | 120 pc. | 2,025 lb. | TJB-2002S-B |



Swivel, Tube Mount Jacks

| PART NUMBER | LIFT CAP. | TRAVEL | R | E | DESCRIPTION | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|----------------|--------------|--------|-----|-----|---------------------------------------|-------------|--------------|-------------|------------|
| TR-JTWT2K-10 | 2,000 lb. | 10" | 11" | 21" | Top Wind Swivel, Tube Mount, Black | 10.30 lb. | 150 pc. | 1,585 lb. | TJP-2001-B |
| TR-JTWT2K-15 | 2,000 lb. | 15" | 11" | 26" | Top Wind Swivel, Tube Mount, Black | 12.10 lb. | 150 pc. | 1,855 lb. | TJP-2002-B |
| TR-JTWT5K-10 | 5,000 lb. | 10" | 11" | 21" | Top Wind Swivel, Tube Mount, Black | 11.50 lb. | 150 pc. | 1,765 lb. | TJP-5001-B |
| TR-JTWT5K-15 | 5,000 lb. | 15" | 11" | 26" | Top Wind Swivel, Tube Mount, Black | 13.50 lb. | 150 pc. | 2,065 lb. | TJP-5002-B |



Direct Weld, Light-Duty Jacks

| PART NUMBER | LIFT CAP. | TRAVEL | R | E | DESCRIPTION | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|----------------|--------------|--------|--------|--------|--|-------------|--------------|-------------|------------|
| TR-JTWD7K-15 | 7,000 lb. | 15" | 22.50" | 37.50" | Top Wind w/Drop-Leg, Square, Black | 21.30 lb. | 100 pc. | 2,170 lb. | TJD-7000 |
| TR-JSWD7K-15 | 7,000 lb. | 15" | 24.75" | 39.75" | Side Wind w/Drop-Leg, Square, Black | 23.30 lb. | 100 pc. | 2,370 lb. | TJD-7000-S |







Trailer Frame Jacks

Direct Weld, Medium-Duty Jacks

| PART NUMBER | LIFT CAP. | TRAVEL | R | E | DESCRIPTION | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|----------------|--------------|-----------------|--------|--------------------|---|-------------|--------------|-------------|----------------|
| TR-JSWD12K-FP | 12,000 lb. | 12.50" - 26" | 28.25" | 41.75" - 54.25" | Side Wind w/Front Pull Pin, Crank Handle w/Spring Return, Square, Black | 64 lb. | 30 pc. | 1,960 lb. | TJD-12000SP-F2 |
| TR-JSWD12K-SP | 12,000 lb. | 12.50" - 26" | 28.25" | 41.75" - 54.25" | Side Wind w/Side Pull Pin, Crank Handle w/Spring Return, Square, Black | 64 lb. | 30 pc. | 1,960 lb. | TJD-12000SP-R2 |



Direct Weld, Two-Speed Medium-Duty Jack

| PART NUMBER | LIFT CAP. | TRAVEL | R | E | DESCRIPTION | UNIT WT. | CASE QTY. | CASE WT. | REF. # |
|-----------------|--------------|-----------------|-----|-----------------|--|-------------|--------------|--------------|------------------|
| TR-JSWD2S12K-FP | 12,000 lb. | 12.50" - 26" | 29" | 41.75" - 55" | Two Speed Side Wind w/ Front Pull Pin, Crank Handle w/Spring Return, Black | 70 lb. | 25 pc. | 2,140 lb. | TJD2SP-12900SP-F |



Electric Jack

| PART NUMBER | LIFT CAP. | TRAVEL | R | E | DESCRIPTION | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|----------------|--------------|--------|----|-------|---|-------------|--------------|-------------|---------|
| TR-JE3.5K-24 | 3,500 lb. | 19.5" | 9" | 28.5" | 12V DC Powered w/Manual Override Crank Drop Through Bolt-On or Weld-On, Black | 20.3 lb. | 36 pc. | 818 lb. | EJ-3520 |









Side Wind Marine Jacks

| PART NUMBER | LIFT CAP. | TRAVEL | R | E | DESCRIPTION | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|------------------|--------------|-----------|--------|--------------------|---|-------------|--------------|-------------|--------------|
| TR-JSWWM1K-10 | 1,000 lb. | 10" | 12.5" | 22.50" | Side Wind Swivel, Weld-On, w/6" Caster | 13.20 lb. | 150 pc. | 2,020 lb. | MJ-1000W |
| TR-JSWBM1.2K-10 | 1,200 lb. | 11" | 12.25" | 23.25" | Side Wind Swivel, Bolt-On, w/6" Caster | 14.70 lb. | 120 pc. | 1,801 lb. | MJ-1206B |
| TR-JSWBM1.5K-10 | 1,500 lb. | 10" | 13" | 23" | Side Wind Swivel, Bolt-On, w/8" Caster | 19.10 lb. | 100 pc. | 1,950 lb. | MJ-1500B |
| TR-JSWBMD1.5K-10 | 1,500 lb. | 10" | 12" | 22" | Side Wind Swivel, Bolt-On, w/6" Dual Caster | 19.60 lb. | 90 pc. | 1,804 lb. | MJ-1500B-DWL |
| TR-JSWFBM2.5K-28 | 2,500 lb. | 15"-28.5" | 7.25" | 22.25" - 35.75" | Square Side Wind Fixed, Bolt-On, w/jack Ft | 25.70 lb. | 100 pc. | 2,610 lb. | MJSQ-2500B |

[•] Zinc Plated. The specifications and dimensions above are for reference only.

Cast-Head Couplers

A-Frame



| PART NUMBER | BALL SIZE | TONGUE TYPE | SAE CLASS | CAPACITY | FINISH | UNIT WT. | CASE QTY. | CASE WT. | REF. # |
|------------------|--------------|----------------|--------------|------------|--------|-------------|--------------|-------------|-----------|
| TR-CAC7K-2.00 | 2" | A-Frame | 4 | 7,000 lb. | Black | 14 lb. | 150 pc. | 2,140 lb. | CA-5196-B |
| TR-CAC12.5K-2.31 | 2-15/16" | A-Frame | 4 | 12,500 lb. | Black | 18 lb. | 125 pc. | 2,290 lb. | CA-5296-B |

TR-AAZ7K-2.00

Adjustable-Sleeve Lock

| PART NUMBER | BALL SIZE | TONGUE TYPE | SAE CLASS | CAPACITY | FINISH | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|------------------|--------------|----------------|--------------|------------|--------|-------------|--------------|-------------|---------|
| TR-CCA7K-2.00 | 2" | Adjustable | 4 | 7,000 lb. | Black | 11.20 lb. | 175 pc. | 2,000 lb. | CTA-196 |
| TR-CCA12.5K-2.31 | 2-15/16" | Adjustable | 4 | 12,500 lb. | Black | 13 lb. | 150 pc. | 1,990 lb. | CTA-296 |

[•] With Grade 8 Bolts/Nuts



Adjustable-Top Lever Latch

TR-CCA15K-2.31

| PART NUMBER | BALL SIZE | TONGUE TYPE | SAE CLASS | CAPACITY | FINISH | UNIT WT. | CASE QTY. | CASE WT. | REF. # |
|----------------|--------------|----------------|--------------|------------|--------|-------------|--------------|-------------|---------|
| TR-CCA15K-2.31 | 2-15/16" | Adjustable | 4 | 15,000 lb. | Black | 13.23 lb. | 200 pc. | 2,734 lb. | CTA-280 |

[•] With Grade 8 Bolts/Nuts

Mounting Bracket



| PART NUMBER | DESCRIPTION | CAPACITY | FINISH | UNIT WT. | CASE QTY. | CASE WT. | REF. # |
|----------------|---------------------------------------|------------|--------|-------------|--------------|-------------|---------|
| TR-ACMB-6 | Mounting Bracket, 6 Hole / 5 Position | 15,000 lb. | Black | 6.17 lb. | 250 pc. | 1,543 lb. | CTA-CB6 |



Stamped Couplers

Straight Tongue





TR-CS2K-1.88X2.00

TR-CS2KZ-1.88X2.50

| PART NUMBER | BALL SIZE | TONGUE SIZE | SAE CLASS | CAPACITY | FINISH | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|----------------------|--------------|----------------|--------------|-----------|--------|-------------|--------------|-------------|-----------|
| TR-CS2KZ-1.88X2.00 | 1-7/8" | 2" | 1 | 2,000 lb. | Zinc | 2.50 lb. | 500 pc. | 1,290 lb. | CT-2001-Z |
| TR-CS2K-1.88X2.00 | 1-7/8" | 2" | 1 | 2,000 lb. | Oily | 2.50 lb. | 500 pc. | 1,290 lb. | CT-2001-0 |
| TR-CS2KZ-1.88X2.50 | 1-7/8" | 2-1/2" | 1 | 2,000 lb. | Zinc | 2.60 lb. | 500 pc. | 1,340 lb. | CT-2002-Z |
| TR-CS2K-1.88X2.50 | 1-7/8" | 2-1/2" | 1 | 2,000 lb. | Oily | 2.60 lb. | 500 pc. | 1,340 lb. | CT-2002-0 |
| TR-CS2KZ-1.88X3.00 | 1-7/8" | 3" | 1 | 2,000 lb. | Zinc | 3.02 lb. | 500 pc. | 1,550 lb. | CT-2003-Z |
| TR-CS2K-1.88X3.00 | 1-7/8" | 3" | 1 | 2,000 lb. | Oily | 3.02 lb. | 500 pc. | 1,550 lb. | CT-2003-0 |
| TR-CS3.5KZ-2.00X2.00 | 2" | 2" | 2 | 3,500 lb. | Zinc | 4.10 lb. | 500 pc. | 2,090 lb. | CT-3001-Z |
| TR-CS3.5K-2.00X2.00 | 2" | 2" | 2 | 3,500 lb | Oily | 4.10 lb. | 500 pc. | 2,090 lb. | CT-3001-0 |
| TR-CS3.5KZ-2.00X2.50 | 2" | 2-1/2" | 2 | 3,500 lb | Zinc | 4.20 lb. | 500 pc. | 2,140 lb. | CT-3002-Z |
| TR-CS3.5K-2.00X2.50 | 2" | 2-1/2" | 2 | 3,500 lb | Oily | 4.20 lb. | 500 pc. | 2,140 lb. | CT-3002-0 |
| TR-CS3.5KZ-2.00X3.00 | 2" | 3" | 2 | 3,500 lb | Zinc | 4.40 lb. | 500 pc. | 2,240 lb. | CT-3003-Z |
| TR-CS3.5K-2.00X3.00 | 2" | 3" | 2 | 3,500 lb | Oily | 4.40 lb. | 500 pc. | 2,240 lb. | CT-3003-0 |
| TR-CS5KZ-2.00X3.00 | 2" | 3" | 2 | 5,000 lb | Zinc | 5.20 lb. | 500 pc. | 2,640 lb. | CT-5003-Z |
| TR-CS5K-2.00X3.00 | 2" | 3" | 2 | 5,000 lb | Oily | 5.20 lb. | 500 pc. | 2,640 lb. | CT-5003-0 |

A-Frame & Yoke Style A-Frame





| PART NUMBER | BALL SIZE | TONGUE TYPE | SAE CLASS | CAPACITY | FINISH | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|----------------|--------------|----------------|--------------|------------|--------|-------------|--------------|-------------|-----------|
| TR-CA5K-2.00 | 2" | A-Frame | 3 | 5,000 lb. | Black | 6.50 lb. | 250 pc. | 1,665 lb. | CA-5100-B |
| TR-CAY8K-2.00 | 2" | A-Frame | 4 | 8,000 lb. | Black | 7.50 lb. | 220 pc. | 1,690 lb. | CA-5210-B |
| TR-CA14K-2.31 | 2-5/16" | A-Frame | 4 | 14,000 lb. | Black | 8.50 lb. | 250 pc. | 2,165 lb. | CA-5400-B |

Gooseneck **Couplers** & Winches



TR-CGR25K-2.31

TR-CGS25K-2.31

Round & Square Gooseneck Couplers

| PART NUMBER | BALL SIZE | DESCRIPTION | CAPACITY | UNIT WT. | CASE QTY. | CASE WT. | REF.# |
|----------------|--------------|---|------------|-------------|--------------|-------------|------------|
| TR-CGR25K-2.31 | 2-15/16" | Round Adjustable Gooseneck Coupler, 29" Retracted Height w/8" Travel, 4-1/2" Diameter Outer Tube, 4" Diameter Inner Tube w/Cast Locking Plate & 3/4" Load Bearing Pin, 2 Set Screws | 25,000 lb. | 54.73 lb. | 30 pc. | 1,642 lb. | GCPN-25008 |
| TR-CGR30K-2.31 | 2-15/16" | Round Adjustable Gooseneck Coupler, 29" Retracted Height w/8" Travel, 4-1/2" Diameter Outer Tube, 4" Diameter Inner Tube w/Cast Locking Plate & 3/4" Load Bearing Pin, 2 Set Screws | 30,000 lb. | 61.36 lb. | 30 pc. | 1,841 lb. | GCPN-30008 |
| TR-CGS25K-2.31 | 2-15/16" | Square Adjustable Gooseneck Coupler, 29" Retracted Height w/8" Travel, 4-1/2" Diameter Outer Tube, 4" Diameter Inner Tube w/Cast Locking Plate & 3/4" Load Bearing Pin, 1 Set Screw | 25,000 lb. | 70.16 lb. | 30 pc. | 2,105 lb. | GCSQ-25008 |

[•] All gooseneck couplers with load-bearing pin meet SAE J2638 standard

Hand Winches

| PART NUMBER | DESCRIPTION | UNIT WT. | BOX QTY. | BOX WT | BOXES PER SKID | REF.# |
|----------------|---|-------------|-------------|-----------|-------------------|---------|
| TR-WH1K | Single-Speed Trailer Winch, 1,000 lb. Capacity, Zinc Plated | 5.51 lb. | 6 pc. | 37 lb. | 25 pc. | HW-1000 |
| TR-WH1.4K | Single-Speed Trailer Winch, 1,400 lb. Capacity, Zinc Plated | 5.86 lb. | 6 pc. | 40 lb. | 25 pc. | HW-1400 |
| TR-WH1.6K | Single-Speed Trailer Winch, 1,600 lb. Capacity, Zinc Plated | 7.72 lb. | 4 pc. | 29 lb. | 30 pc. | HW-1600 |
| TR-WH2K | Two-Speed Trailer Winch, 2,000 lb. Capacity, Zinc Plated | 8.27 lb. | 4 pc. | 35 lb. | 30 pc. | HW-2000 |



TR-WH1K



Brake Winches

| PART NUMBER | DESCRIPTION | UNIT WT. | BOX QTY. | BOX WT | BOXES PER SKID | REF.# |
|----------------|---|-------------|-------------|-----------|-------------------|---------|
| TR-WB1K | Self-Activating Brake Winch, 1,000 lb. Capacity, Zinc Plated | 5.51 lb. | 6 pc. | 37 lb. | 25 pc. | BW-1000 |
| TR-WB1.5K | Self-Activating Brake Winch, 1,500 lb. Capacity, Zinc Plated | 7.50 lb. | 6 pc. | 50 lb. | 25 pc. | BW-1400 |



Winch Straps

| PART NUMBER | DESCRIPTION | BOX QTY. | BOX WT. | BOXES PER SKID |
|----------------|--|-------------|------------|-------------------|
| TR-WH1KS | Nylon 2" x 26.2" Strap w/Snap Hook, 1,000 lb. Capacity | 39 pc. | 41 lb. | 24 |
| TR-WH1.4KS | Nylon 2" x 26.2" Strap w/Snap Hook, 1,400 lb. Capacity | 36 pc. | 37 lb. | 24 |
| TR-WH1.6KS | Nylon 2" x 26.2" Strap w/Snap Hook, 1,600 lb. Capacity | 35 pc. | 40 lb. | 24 |
| TR-WH2KS | Nylon 2" x 26.2" Strap w/Snap Hook, 2,000 lb. Capacity | 35 pc. | 44 lb. | 24 |



The specifications and dimensions above are for reference only.

Surge Actuators

| PART NUMBER | DESCRIPTION | |
|------------------------|------------------------------|--|
| TR-AS7K-2.00-WO-DISC | 7K, 2" Ball, Weld-On, Disc | |
| TR-AS8.4K-2.00-WO-DISC | 8.4K, 2" Ball, Weld-On, Disc | |

The specifications and dimensions above are for reference only.





TR-AS8.4K-2.00-W0-DISC

Accessories & Parts

Trailer Jack Accessories & Parts

| PART NUMBER | DESCRIPTION | UNIT WT. | CRATE QTY. | CRATE WT. | REF# |
|------------------|--|-------------|---------------|--------------|--------------|
| TR-AJF-2.00 | Jack Foot w/hardware, 2" Tube, Zinc | 1.20 lb. | 1,000 pc. | 1,200 lb. | JF-99 |
| TR-AJFHD-2.00 | Heavy-Duty Foot w/hardware, 2" Tube | 1.90 lb. | 1,000 pc. | 1,780 lb. | JF-100-Z |
| TR-AJDL9.50-2.00 | Drop Leg w/hardware, 9-1/2", 2" Tube | 2.85 lb. | 500 pc. | 1,425 lb. | F-1005H-Z |
| TR-AJC-6.00 | Removable 6" Caster Wheel, 2" Tube | 4.76 lb. | 300 pc. | 1,428 lb. | JC-101 |
| TR-AJBSP | Bottom Support Plate for A-Frame Jacks | 0.69 lb. | 3,000 pc. | 2,079 lb. | JSP-100 |
| TR-AMBR-P | Weld-On Retaining Mounting Bracket Plate | 1.20 lb. | 2,000 pc. | 2,400 lb. | TJB-MB |
| TR-AMBR-R | Retaining Ring | 0.02 lb. | 2,500 pc. | 50 lb. | SNP-RING |
| TR-AMBJT-2.00 | Tubular Mounting Bracket, 2" Tube | 1.00 lb. | 2,000 pc. | 2,000 lb. | TJP-IP |
| TR-AJCH12K | Crank Handle for 12,000 lb. Jack | 2.98 lb. | 500 pc. | 1,490 lb. | TJD-12000-HD |



Jack Foot TR-AJF-2.00



Heavy-Duty Foot TR-AJFHD-2.00



Crank Handle TR-AJCH12K



6" Caster Wheel TR-AJC-6.00



A-Frame Support Plate TR-AJBSP



Mounting **Bracket Plate** TR-AMBR-P



Retaining Ring TR-AMBR-R



Tubular Mounting Bracket TR-AMBJT-2.00



Drop Leg TR-AJDL9.50-2.00



Trailer Jack Accessories & Parts

| PART NUMBER | DESCRIPTION | REF# |
|-------------------|--|--------------|
| TR-AJHTW-2K | Replacement Jack Handle, 2,000 lb. | TJA-2000-HD |
| TR-AJHTW-5K | Replacement Jack Handle, 5,000 lb. | TJA-5000-HD |
| TR-AJHTW-7K | Replacement Jack Handle, Top Wind 7,000 lb. Drop Leg Jack | TJD-7000-HD |
| TR-AJHSW-7K | Replacement Jack Handle, Side Wind 7,000 lb. Drop Leg Jack | TJD-7000S-HD |
| TR-AJGK-12K | Replacement Gear Kit for 12,000 lb. Drop Leg Jack | TJD-12000-GR |
| TR-AMJHSW-1K-1.5K | Replacement Marine Jack Handle for Side Wind, 1K, 1.2K, 1.5K | MJ-1000B-HD |
| TR-AMJMBK-1K-1.5K | Replacement Marine Jack Mounting Bracket Kit, 1K, 1.2K, 1.5K | MJ-1000B-MK |
| TR-CRK1.88-2K | Coupler Repair Kit, 1-3/4" Ball, 2,000 lb. | CT-2000-RK |
| TR-CRK2.00-3.5K | Coupler Repair Kit, 2" Ball, 3,500 lb. | CT-3000-RK |
| TR-CRK2.00-5K | Coupler Repair Kit, 2" Ball, 5,000 lb. | CT-5100-RK |

The specifications and dimensions above are for reference only.



Jack Handle, Top Wind TR-AJHTW-2K TR-AJHTW-5K



Jack Handle, Top Wind TR-AJHTW-7K



Jack Handle, Side Wind TR-AJHSW-7K



Marine Jack Handle, **Side Wind**

TR-AMJHSW-1K-1.5K



Marine Jack Mounting Bracket Kit TR-AMJMBK-1K-1.5K



Coupler Repair Kit TR-CRK2.00-3.5K



Gear Kit for 12K Drop Leg Jack TR-AJGK-12K

High Speed Products

Axle & Suspension Components

- TruRyde electric & hydraulic drum brakes
- TruRyde idler hubs and brake drums
- Tapered roller bearings
- · Grease seals
- Spindle fasteners and accessories
- Dust caps

- Leaf springs double eye & slipper multi leaf and single leaf MH
- Equalizers cast and fabricated
- Stampings hangers, tie plates, shackle links, spring seats and brake flanges
- Spindles butt weld straight & drop, boat trailer drop, round & square bar stock
- Mobile home axle products
- Misc. bushings, rim clamps, **U-Bolts**



Production Machining

- Production machining capabilities machined to print
- Spindle brake flange welding capabilities
- CNC horizontal lathes with live tooling CNC
- Vertical and horizontal mills 3 & 4 axis quality lab



TruRyde & DeeMaxx Disc Brakes

- 3.5k, 6k, 7k, 8k
- 10-12k single wheel
- 12-16k dual wheel
- TruRyde-DeeMaxx value line 3.5k and 6k
- Integrated or slip-over vented rotors, hubs, calipers and brackets
- High performance brake lines, DOT approved





Packaged Parts

- Bearing, dust cap, and grease seal kits, tie plate and U-Bolt kits
- Shackle bolt and shackle link kits
- Lug nut and wheel stud kits
- Bushing kits
- Idler hub and brake drum kits boxed brake assemblies



EMCO Industries

Leaf Spring Manufacturing

- Double eye & slipper multi leaf and single leaf parabolic
- Heavy-duty 3 leaf tapers
- Specialty springs
- AG rotary cutter blades
- Powder coat capability
- Domestic and off-shore manufacturing locations with quality lab

Cutter Blades

Three Leaf Tapered Springs





Custom Manufactured Components



Bushing



Kingpins



Planter Clevis



Suspension Blocks



Machined Forged Torsion Arms



Torsion Spindles



Custom Spindle



Dust Cap Driver



Drive Shaft



Stainless Steel Valve



Custom Hubs



Terms & Conditions

TERMS

All orders are subject to credit approval by our credit department. Net 30 days from date of shipment, unless specified otherwise in writing by TRP International. All past due accounts shall accrue interest at a rate of 1.5% per month based upon the outstanding balance at the end of the month plus any additional fees incurred in the collection process, including attorney fees.

PRICES

All shipments will be at the prices in effect at order acceptance, including any possible raw material surcharges that may be implemented. Prices and specifications are subject to change without notice. Minimum order of \$100.00 is required. Any order less than \$100.00 will be subject to a \$25.00 handling charge.

ORDERS

TRP International's acceptance of customer orders, whether verbal or written does not include an acknowledgment or acceptance on behalf of TRP of any terms or conditions of customers purchase order, whether stated expressly or implied.

CANCELLATION AND CHANGES

Due to immediate production of manufactured products, orders containing these items are considered firm and are not subject to cancellation or change without approval. Any approved cancellations or changes are subject to additional charges at TRP International's discretion.

FREIGHT

All shipments are F.O.B. TRP International and are shipped "Freight Collect" unless specified otherwise in writing by TRP. Products are carefully inspected and packed to assure that they will arrive in good condition.

In case of shortage or damage, purchaser should promptly file a claim with the delivering carrier. TRP is not liable for damage or loss of merchandise after it has left our facilities, we will however assist you in filing a claim.

RETURNS

Return requests must be made within 30 days of shipment. Return authorization is required before the items are returned for any reason. We will consider issuing a return authorization for the following reasons; manufacturing defect, order processing error, shipping error, mismarked cartons, or duplicated shipments. Returns for any other reason, and no fault of TRP, are subject to a 20% restocking charge and when authorized, must be returned freight prepaid. Return merchandise will be subject to inspection.

Any discrepancies, additional damage, signs of use, or missing parts will result in an adjustment to the amount of credit issued.

LIMITED WARRANTY

The products listed in this catalog are warranted by the manufacturers to be free from defects in materials and workmanship for a period of one year from the date of original purchase. This warranty is in lieu of all other warranties expressed or implied. This warranty covers normal use and application and does not cover damage or defect which results from alteration, accident, neglect, improper installation, operation or maintenance.

TRP International's obligation under this warranty is limited to the repair or replacement of the defective part, and in no event shall TRP be liable for reimbursement of consequential, indirect or incidental damages of any kind.





Recognized as a component for assembly with a complete running gear as described in QAI listing REC625-1.



CORPORATE OFFICE:

TRP Corporate
22420 Challenger Drive
Elkhart, IN 46514
P: 574.970.1680 F: 574.970.1681
Email: trpintl@trpintl.com

www.trpintl.com

MANUFACTURING SITES:

Elkhart, IN Claremore, OK

TRP LIAISON OFFICE:

TRP China – Hefei, China

TRP DISTRIBUTION CENTERS:

Indiana:

22420 Challenger Drive Elkhart, IN 46514 **P:** 574.389.9941 **F:** 574.389.9944

www.trpintl.com

Texas:

324 S. Town East Blvd. Mesquite, TX 75149 **P:** 972.279.9863 **F:** 972.279.9864

www.trpintl.com



SUPPLYING THE WORLD.









